


Geberit Pluvia roof outlet for gutters

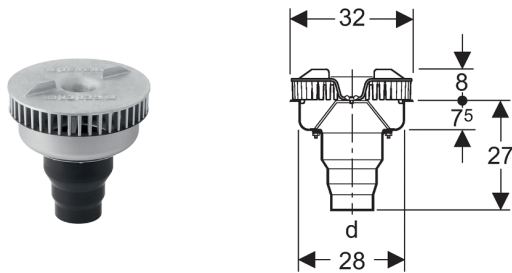

Application purposes

- For collecting and draining off rainwater from roofs
- For gutters with a minimum width of 35 cm
- For connecting metallic product materials
- For syphonic roof drainage systems

Characteristics

- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector permanently mounted, \varnothing 110 mm, made of PE-HD
- Outlet grating with integrated function disc
- Base unit with built-in outlet disc

Technical data

Discharge rate	45 l/s
Maximum head of water	80 mm

Scope of delivery

- Outlet grating with function disc
- Base unit with contact rim made of CrNi steel 1.4301
- Wing nut and prevailing torque nuts, made of CrNi steel 1.4301

Article

Art. no.	DN	Sealing of connection	d, \varnothing [mm]
359.342.00.1	100	CrNi steel 1.4301	110

 For emergency overflow only