


**Geberit Pluvia roof outlet with fastening flange, for roof foils, outlet grating made of aluminium cast**

NEW

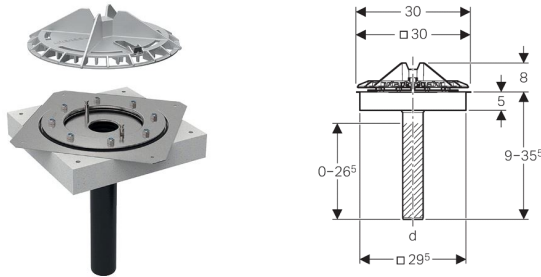

**Application purposes**

- For collecting and draining off rainwater from roofs
- For syphonic roof drainage systems
- For roof foils without fleece lamination
- For connecting to roof foils with thicknesses  $\leq 4$  mm

**Characteristics**

- Vertical outlet
- Straight connector made of PE-HD, can be shortened
- Straight connector can be reduced directly or extended
- Outlet grating with integrated function disc
- Outlet grating attached with ledger lock
- Maintenance-free clamping flange joint
- Not compatible with emergency overflow set

**Technical data**

Maximum discharge rate	12 l/s
Maximum head of water	40 mm

**Scope of delivery**

- Base unit with contact sheet made of CrNi steel 1.4301
- Outlet grating with function disc made of aluminium cast
- Fastening flange with prevailing torque nuts
- Flange gasket made of EPDM
- Anti-condensation insulation

**Article**

Art. no.	DN	Sealing of connection	d, $\varnothing$ [mm]
359.106.00.1	56	CrNi steel 1.4301	56

- i** Must not be used for bitumen roof foils
- i** Available as of April 2017

**Accessories**

- Installation sheet for Geberit Pluvia roof outlet with fastening flange, for roof foils