


**Geberit Pluvia roof outlet with fastening flange, for roof foils**

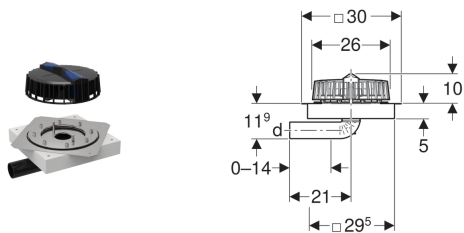

**Application purposes**

- For collecting and draining off rainwater from roofs
- For renovated roofs
- For roof foils without fleece lamination
- For syphonic roof drainage systems
- For connecting to roof foils with thicknesses ≤ 4 mm
- For horizontal pipe connections

**Characteristics**

- Horizontal outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened

- Maintenance-free clamping flange joint
- Low installation height

**Technical data**

Maximum discharge rate	9 l/s
Maximum head of water	40 mm

**Scope of delivery**

- Outlet grating with function disc
- Base unit with contact sheet made of CrNi steel 1.4301
- Flange gasket made of EPDM
- Fastening flange with prevailing torque nuts
- Anticondensation insulation

Art. no.	DN	Sealing of connection	d, Ø
359.117.00.1	56	CrNi steel 1.4301	56 mm



- Must not be used for bitumen roof foils

Created with Geberit online product catalogue - 05/07/2018