


Geberit Pluvia roof outlet with contact sheet

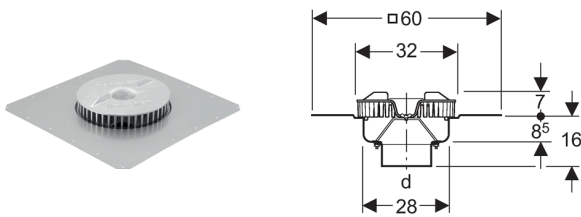

Application purposes

- For collecting and draining off rainwater from roofs
- For syphonic roof drainage systems
- For connecting bituminous roof sealings

Characteristics

- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector permanently mounted, \varnothing 160 mm, made of PE-HD
- Outlet grating with integrated function disc
- Base unit with built-in outlet disc

Technical data


Discharge rate	100 l/s
Maximum head of water	105 mm

Scope of delivery

- Outlet grating with function disc
- Base unit with contact sheet made of CrNi steel 1.4301
- Wing nut and prevailing torque nuts, made of CrNi steel 1.4301
- Protection box cover

Article

Art. no.	DN	Sealing of connection	d, \varnothing [mm]
359.347.00.1	155	CrNi steel 1.4301	160

 For emergency overflow only